



CE EMC Test Report

Equipment under Test : Brushless DC motor controller

Trade Name: : N/A

Model /Type : 60-800W

Listed Models : 48-350W, 48-500W, 48-800W, 48-1000W, 48-1200W, 48-1500W, 48-2000W, 48-2500W, 48-3000W, 60-350W, 60-500W, 60-800W, 60-1000W,60-1200W, 60-1500W, 60-2000W, 60-2500W, 60-3000W, 72-500W, 72-800W,72-1000W, 72-1200W,72-1500W, 72-2000W, 72-2500W, 72-3000W, 80-500W, 80-800W, 80-1000W,80-1200W, 80-1500W, 80-2000W, 80-2500W, 80-3000W, 84-500W, 84-800W, 84-1000W, 84-1200W, 84-1500W, 84V-2000W, 84-2500W, 84-3000W, 96-500W, 96-800W, 96-1000W, 96-1200W, 96-1500W, 96-2000W, 96-2500W, 96-3000W

Applicant : Taizhou Chifeng Electric Technology Co., Ltd.

Address : 0003-2,Yongyuan Road, Luqiao Street, Luqiao District, Taizhou City, Zhejiang Province,China

Manufacturer : Taizhou Chifeng Electric Technology Co., Ltd.

Address : 0003-2,Yongyuan Road, Luqiao Street, Luqiao District, Taizhou City, Zhejiang Province,China

Laboratory : **Shenzhen Yacetong Testing Technology Services Co., Ltd.**

Address : Room 310, No.12, Tongfu Industrial Zone, Xinhe Community, Fuhai Street, Bao 'an District, Shenzhen, Guangdong, China

Tel : +(86)-0755-23728760

Fax : +(86)-0755-23728760

Website : <http://www.yctlab.com>

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Test Result:	PASS
---------------------	-------------





TEST RESULT CERTIFICATION

Applicant's name.....: Taizhou Chifeng Electric Technology Co., Ltd.
Address.....: 0003-2,Yongyuan Road, Luqiao Street, Luqiao District, Taizhou City, Zhejiang Province,China

Product description

Product name.....: Brushless DC motor controller
Test Model: 60-800W
 EN IEC 61000-3-2-2019+A1:2021
 EN 61000-3-3:2013+A2:2021+AC:2022
Standards.....: EN IEC 61000-6-1:2019
 EN IEC 61000-6-3: 2021

This device described above has been tested by YCT, and the test results show that the equipment under test (EUT) is in compliance with the 2014/30/EU requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of YCT, this document may be altered or revised by YCT, personal only, and shall be noted in the revision of the document.

Date of Test.....:
Date (s) of performance of tests.....: May 15, 2024~May 23, 2024
Date of Issue.....: May 23, 2024
Test Result.....: **Pass**

Compiled by : File administrators
 (position+printed name+signature) : Jack Yu
Supervised by : Technique principal
 (position+printed name+signature) : Peter peng
Approved by : Manager
 (position+printed name+signature) : Jim he





Table of Contents

Page

1 . TEST SUMMARY	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	8
2.3 DESCRIPTION OF TEST SETUP	9
2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL	10
2.5 MEASUREMENT INSTRUMENTS LIST	11
3 . EMC EMISSION TEST	14
3.1 CONDUCTED EMISSION MEASUREMENT	14
3.1.1 POWER LINE CONDUCTED EMISSION	14
3.1.2 TEST PROCEDURE	15
3.1.3 TEST SETUP	15
3.1.4 EUT OPERATING CONDITIONS	15
3.1.5 TEST RESULTS	16
3.2 RADIATED EMISSION MEASUREMENT	18
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	18
3.2.2 LIMITS OF RADIATED EMISSION MEASUREMENT	18
3.2.3 TEST PROCEDURE	18
3.2.4 TEST SETUP	19
3.2.5 EUT OPERATING CONDITIONS	19
3.2.6 TEST RESULTS	20
3.2.6 TEST RESULTS(1000~6000MHz)	22
3.3 HARMONICS CURRENT	22
3.3.1 LIMITS OF HARMONICS CURRENT	22
3.3.1.1 TEST PROCEDURE	23
3.3.1.2 EUT OPERATING CONDITIONS	23
3.3.1.3 TEST SETUP	23
3.3.2 TEST RESULTS	24
3.4 VOLTAGE FLUCTUATION AND FLICKERS	25
3.4.1 LIMITS OF VOLTAGE FLUCTUATION AND FLICKERS	25
3.4.1.1 TEST PROCEDURE	25
3.4.1.2 EUT OPERATING CONDITIONS	25
3.4.1.3 TEST SETUP	25
3.4.2 TEST RESULTS	26
4 . EMC IMMUNITY TEST	27



**Table of Contents****Page**

4.1 STANDARD COMPLIANCE/SERVIRITY LEVEL/CRITERIA	27
4.2 GENERAL PERFORMANCE CRITERIA	28
4.2.2 GENERAL PERFORMANCE CRITERIA TEST SETUP	28
4.3 ESD TESTING	29
4.3.1 TEST SPECIFICATION	29
4.3.2 TEST PROCEDURE	29
4.3.3 TEST SETUP	30
4.3.4 TEST RESULTS	31
4.4 RS TESTING	32
4.4.1 TEST SPECIFICATION	32
4.4.2 TEST PROCEDURE	32
4.4.3 TEST SETUP	33
4.4.4 TEST RESULTS	34
4.5 EFT/BURST TESTING	35
4.5.1 TEST SPECIFICATION	35
4.5.2 TEST PROCEDURE	35
4.5.3 TEST SETUP	36
4.5.4 TEST RESULTS	37
4.6 SURGE TESTING	38
4.6.1 TEST SPECIFICATION	38
4.6.2 TEST PROCEDURE	38
4.6.3 TEST SETUP	39
4.6.4 TEST RESULTS	40
4.7 INJECTION CURRENT TESTING	41
4.7.1 TEST SPECIFICATION	41
4.7.2 TEST PROCEDURE	41
4.7.3 TEST SETUP	41
4.7.4 TEST RESULTS	42
4.8 POWER FREQUENCY MAGNETIC FIELD TESTING	43
4.8.1 TEST SPECIFICATION	43
4.8.2 TEST PROCEDURE	43
4.8.3 TEST SETUP	44
4.8.4 TEST RESULTS	45
4.9 VOLTAGE INTERRUPTION/DIPS TESTING	46
4.9.1 TEST SPECIFICATION	46
4.9.2 TEST PROCEDURE	46
4.9.3 TEST SETUP	46
4.9.4 TEST RESULTS	47



. TEST SUMMARY

Test procedures according to the technical standards:

EMC Emission				
Standard	Test Item	Limit	Judgment	Remark
EN IEC61000-6-4:2018	Conducted Emission	Class B	PASS	
	Radiated Emission	Class B	PASS	
EN IEC 61000-3-2-2019+A1:2021	Harmonic Current Emission	Class A or D NOTE (2)	PASS	
EN 61000-3-3:2013 +A2:2021	Voltage Fluctuations & Flicker	-----	PASS	
EMC Immunity				
Section EN IEC 61000-6-2:2016	Test Item	Performance Criteria	Judgment	Remark
EN 61000-4-2:2009	Electrostatic Discharge	B	PASS	
EN 61000-4-3:2006+A1:2008 +A2:2010	RF electromagnetic field	A	PASS	
EN 61000-4-4:2012	Fast transients	B	PASS	
EN 61000-4-5:2006	Surges	B	PASS	
EN 61000-4-6:2014	Injected Current	A	PASS	
EN 61000-4-8:2010	Power Frequency Magnetic Field	A	PASS	
EN IEC 61000-4-11:2020	Volt. Interruptions Volt. Dips	B / C / C NOTE (3)	PASS	

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report
- (2) The power consumption of EUT is less than 75W and no Limits apply.
- (3) Voltage dip: 100% reduction – Performance Criteria **B**
Voltage dip: 30% reduction – Performance Criteria **C**
Voltage Interruption: 100% Interruption – Performance Criteria **C**
- (4) For client's request and manual description, the test will not be executed.

TEST FACILITY

Shenzhen Yacetong Testing Technology Services Co., Ltd.

Add. : Room 310, No.12, Tongfu Industrial Zone, Xinhe Community, Fuhai Street, Bao 'an District, Shenzhen, Guangdong, China

MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$ · where expended uncertainty **U** is based on a standard uncertainty multiplied by a coverage factor of **k=2** · providing a level of confidence of approximately **95 %**.

Test Item	Uncertainty
Conducted Emission	2.6dB
Radiated Emission(Below 1G)	4.56dB(distance:3m; Polarize:V)
	4.42dB(distance:3m; Polarize:H)
Radiated Emission(1GHz-18GHz)	3.78dB(distance:3m; Polarize:V)
	3.69dB(distance:3m; Polarize:H)
Flicker test	1.7%
Harmonic test	1.88dB
R/S Test	0.92dB
C/S Test	0.68 dB
Test Site Temperature And Humidity	0.6°C
	3%

. GENERAL INFORMATION

GENERAL DESCRIPTION OF EUT

Equipment	Brushless DC motor controller				
Model Name	60-800W				
Additional Model Number(s)	48-350W, 48-500W, 48-800W, 48-1000W, 48-1200W, 48-1500W, 48-2000W, 48-2500W, 48-3000W, 60-350W, 60-500W, 60-800W, 60-1000W, 60-1200W, 60-1500W, 60-2000W, 60-2500W, 60-3000W, 72-500W, 72-800W, 72-1000W, 72-1200W, 72-1500W, 72-2000W, 72-2500W, 72-3000W, 80-500W, 80-800W, 80-1000W, 80-1200W, 80-1500W, 80-2000W, 80-2500W, 80-3000W, 84-500W, 84-800W, 84-1000W, 84-1200W, 84-1500W, 84V-2000W, 84-2500W, 84-3000W, 96-500W, 96-800W, 96-1000W, 96-1200W, 96-1500W, 96-2000W, 96-2500W, 96-3000W				
Model Difference	All models are identical except sockets hole numbers, with or without switch.				
Product Description	<p>The EUT is a Brushless DC motor controller.</p> <table border="1"> <tr> <td>Operating frequency:</td> <td>N/A</td> </tr> <tr> <td>Connecting I/O port:</td> <td>N/A</td> </tr> </table> <p>Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as a Residential, commercial environments Device. More details of EUT technical specification, please refer to the User's Manual.</p>	Operating frequency:	N/A	Connecting I/O port:	N/A
Operating frequency:	N/A				
Connecting I/O port:	N/A				
Power Source	AC Voltage				
Power Rating	AC220V/50Hz				

DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Running

For Conducted Test	
Final Test Mode	Description
Mode 1	Running

For Radiated Test	
Final Test Mode	Description
Mode 1	Running

For EMS Test	
Final Test Mode	Description
Mode 1	Running



DESCRIPTION OF TEST SETUP

Mode 1:



E-1
EUT



DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Brushless DC motor controller	N/A	60-800W	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” means “shielded” “with core”; “NO” means “unshielded” “without core”.

MEASUREMENT INSTRUMENTS LIST

2.5.1 CONDUCTED EMISSION

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	LISN	R&S	ENV216	101334	Apr. 10,2024	Apr. 9,2025	1 year
2	LISN	SCHWARZBECK	NNLK 8129	8129267	Apr. 10,2024	Apr. 9,2025	1 year
3	Pulse Limiter	SCHWARZBECK	VTSD 9561F	9716	Apr. 10,2024	Apr. 9,2025	1 year
4	50Ω Switch	ANRITSU CORP	MP59B	6200983704	Apr. 10,2024	Apr. 9,2025	1 year
5	Test Cable	N/A	C01	N/A	Apr. 10,2024	Apr. 9,2025	1 year
6	Test Cable	N/A	C02	N/A	Apr. 10,2024	Apr. 9,2025	1 year
7	Test Cable	N/A	C03	N/A	Apr. 10,2024	Apr. 9,2025	1 year
8	EMI Test Receiver	R&S	ESCI	101318	Apr. 10,2024	Apr. 9,2025	1 year
9	Passive Voltage Probe	ESH2-Z3	R&S	100173	Apr. 10,2024	Apr. 9,2025	1 year
10	Triple-Loop Antenna	EVERFINE	LIA-2	11020016	Apr. 10,2024	Apr. 9,2025	1 year
11	Absorbing Clamp	R&S	MDS-21	100423	Apr. 10,2024	Apr. 9,2025	1 year

2.5.2 RADIATED TEST SITE

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Bilog Antenna	TESEQ	CBL6111D	31437	Apr. 10,2024	Apr. 9,2025	1 year
2	Test Cable	N/A	R-01	N/A	Apr. 10,2024	Apr. 9,2025	1 year
3	Test Cable	N/A	R-02	N/A	Apr. 10,2024	Apr. 9,2025	1 year
4	EMI Test Receiver	Rohde&Schwarz	ESVD	847312/008	Apr. 10,2024	Apr. 9,2025	1 year
5	Antenna Mast	EM	SC100_1	N/A	N/A	N/A	N/A
6	Turn Table	EM	SC100	060533	N/A	N/A	N/A
7	50Ω Switch	Anritsu Corp	MP59B	6200983705	Apr. 10,2024	Apr. 9,2025	1 year
8	Spectrum Analyzer	Aglient	E4407B	160400005	Apr. 10,2024	Apr. 9,2025	1 year
9	Horn Antenna	EM	EM-AH-10180	2011071402	Apr. 10,2024	Apr. 9,2025	1 year
10	Amplifier	EM	EM-30180	060536	Apr. 10,2024	Apr. 9,2025	1 year

2.5.3 HARMONICS AND FILCK

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Harmonic & Flicker	EM TEST	DPA500	0303-08	Apr. 10,2024	Apr. 9,2025	1 year
2	AC Power Source	EM TEST	ACS500	0203-06	Apr. 10,2024	Apr. 9,2025	1 year

2.5.4 ESD

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	ESD TEST GENERATOR	SCHAFFNER	NSG438	858	Apr. 10,2024	Apr. 9,2025	1 year

2.5.5 RS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Signal Generator	R&S	SMT 06	832080/007	Apr. 10,2024	Apr. 9,2025	1 year
2	Log-Bicon Antenna	Schwarzbeck	VULB9161	4022	Apr. 10,2024	Apr. 9,2025	1 year
3	Power Amplifier	AR	150W1000M1	320946	Apr. 10,2024	Apr. 9,2025	1 year
4	Microwave Horn Antenna	AR	AT4002A	321467	Apr. 10,2024	Apr. 9,2025	1 year
5	Power Amplifier	AR	25S1G4A	308598	Apr. 10,2024	Apr. 9,2025	1 year

2.5.6 SURGE, EFT/BURST, VOLTAGE INTERRUPTION/DIPS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Surge Generator	EVERFINE	EMS61000-5A	1101002	Apr. 10,2024	Apr. 9,2025	1 year
2	DIPS Generator	EVERFINE	EMS61000-11K	1011002	Apr. 10,2024	Apr. 9,2025	1 year
3	EFT/B Generator	EVERFINE	EMS61000-4A-V2	1012005	Apr. 10,2024	Apr. 9,2025	1 year

2.5.7 INJECTION CURRENT

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Signal Generator	IFR	2023A	202301/368	Apr. 10,2024	Apr. 9,2025	1 year
2	Power Amplifier	AR	75A250AM1	0320709	Apr. 10,2024	Apr. 9,2025	1 year
3	CDN	FCC	FCC-801-M2	06043	Apr. 10,2024	Apr. 9,2025	1 year
4	EM Clamp	FCC	F-203I-23MM	504	Apr. 10,2024	Apr. 9,2025	1 year

2.5.8 MF

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Generator	EVERFINE	EMS61000-8K	1007001	Apr. 10,2024	Apr. 9,2025	1 year

. EMC EMISSION TEST

CONDUCTED EMISSION MEASUREMENT

POWER LINE CONDUCTED EMISSION

(Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

(1) The tighter limit applies at the band edges.

(2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

TEST SETUP

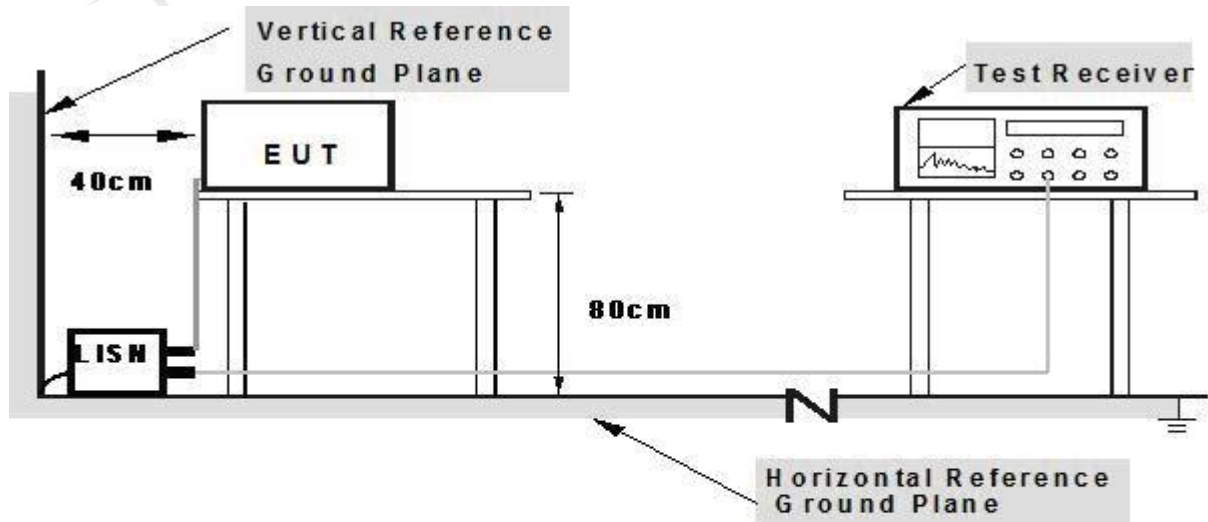

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.3** Unless otherwise a special operating condition is specified in the follows during the testing.




TEST RESULTS

EUT :	Brushless DC motor controller	Model Name. :	60-800W
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2024-5-22
Test Mode :	Running	Phase :	L
Test Voltage :	AC220V/50Hz		

Remark:

Factor = Insertion Loss + Cable Loss.

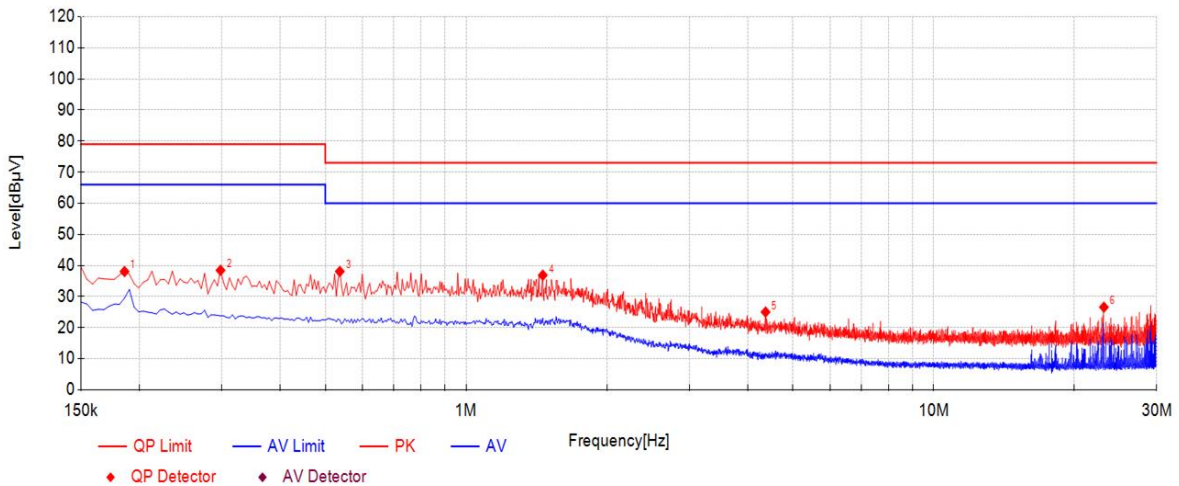

Suspected List


NO.	Freq. [MHz]	Reading [dBμV]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Detector	Type	Verdict
1	0.186	27.56	38.06	10.50	79.00	40.94	PK	L1	PASS
2	0.2985	27.95	38.45	10.50	79.00	40.55	PK	L1	PASS
3	0.537	27.57	38.07	10.50	73.00	34.93	PK	L1	PASS
4	1.4595	26.37	36.87	10.50	73.00	36.13	PK	L1	PASS
5	4.371	14.53	25.03	10.50	73.00	47.97	PK	L1	PASS
6	23.1315	16.09	26.59	10.50	73.00	46.41	PK	L1	PASS



EUT :	Brushless DC motor controller	Model Name. :	60-800W
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2024-5-22
Test Mode :	Running	Phase :	N
Test Voltage :	AC220V/50Hz		

Remark:

Factor = Insertion Loss + Cable Loss.

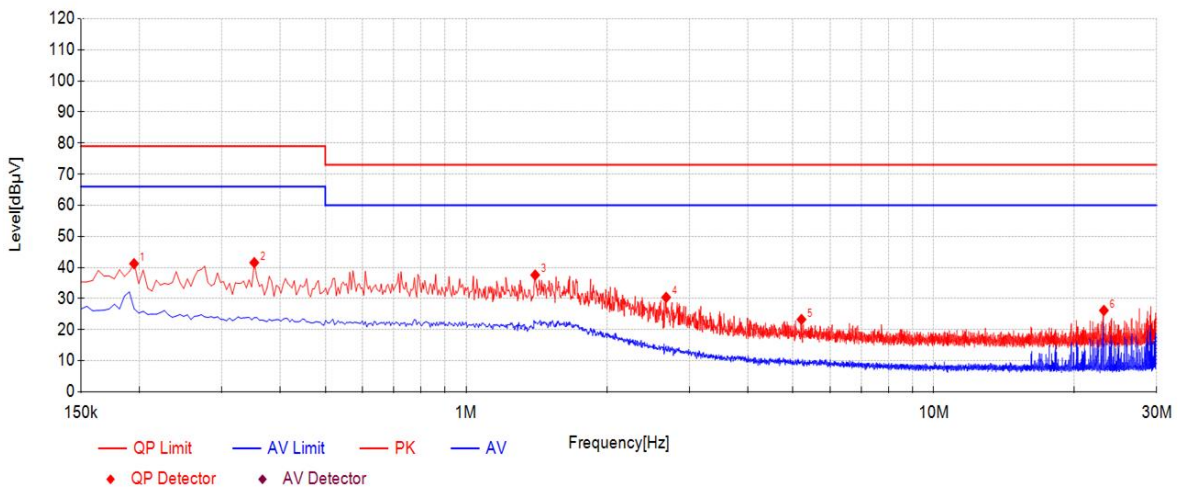

Suspected List

NO.	Freq. [MHz]	Reading [dBµV]	Level [dBµV]	Factor [dB]	Limit [dBµV]	Margin [dB]	Detector	Type	Verdict
1	0.195	30.72	41.22	10.50	79.00	37.78	PK	N	PASS
2	0.3525	31.06	41.56	10.50	79.00	37.44	PK	N	PASS
3	1.4055	27.08	37.58	10.50	73.00	35.42	PK	N	PASS
4	2.679	19.88	30.38	10.50	73.00	42.62	PK	N	PASS
5	5.217	12.77	23.27	10.50	73.00	49.73	PK	N	PASS
6	23.127	15.68	26.18	10.50	73.00	46.82	PK	N	PASS

RADIATED EMISSION MEASUREMENT
LIMITS OF RADIATED EMISSION MEASUREMENT (Below 1000MHz)

FREQUENCY (MHz)	Class A		Class B	
	At 10m	At 3m	At 10m	At 3m
	dBuV/m	dBuV/m	dBuV/m	dBuV/m
30 – 230	40	50	30	40
230 – 1000	47	57	37	47

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class A (at 3m) dBuV/m		Class B (at 3m) dBuV/m	
	Peak	Avg	Peak	Avg
1000-3000	76	56	70	50
3000-6000	80	60	74	54

Notes:


- (1) The limit for radiated test was performed according to as following:
CISPR 22.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

TEST PROCEDURE


- a. The measuring distance of at 10 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured, above 1G Average detector mode will be instead.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP(AV) Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

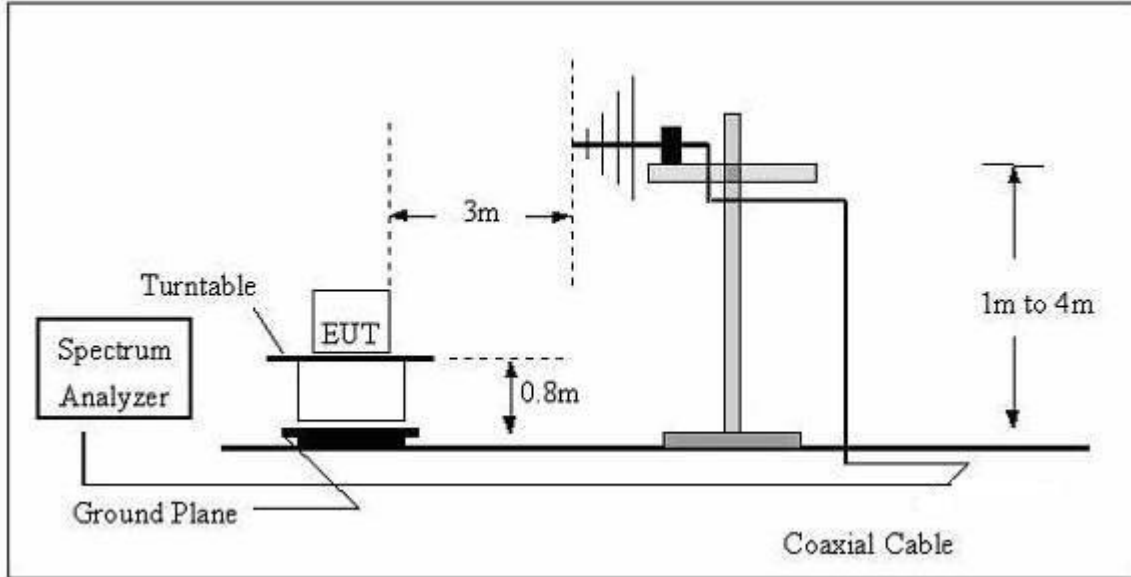

(B) Radiated Emission Test Set-Up Frequency Above 1GHz

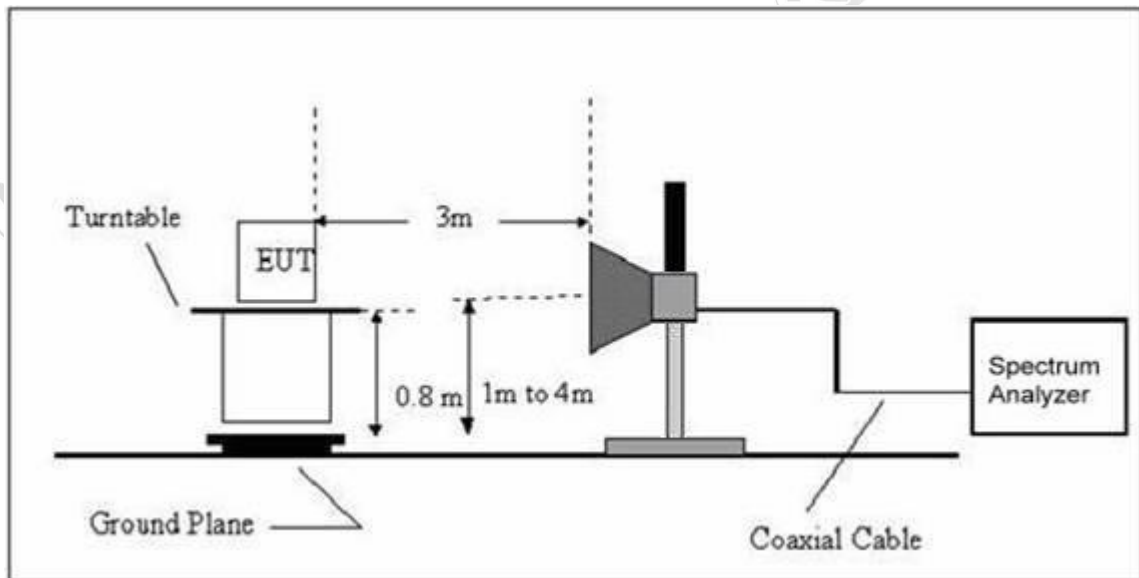

EUT OPERATING CONDITIONS


The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.6 TEST RESULTS

EUT :	Brushless DC motor controller	Model Name :	60-800W
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2024-5-22
Test Mode :	Running	Polarization :	Horizontal
Test Power :	AC220V/50Hz		

Remark:

Factor = Antenna Factor + Cable Loss.

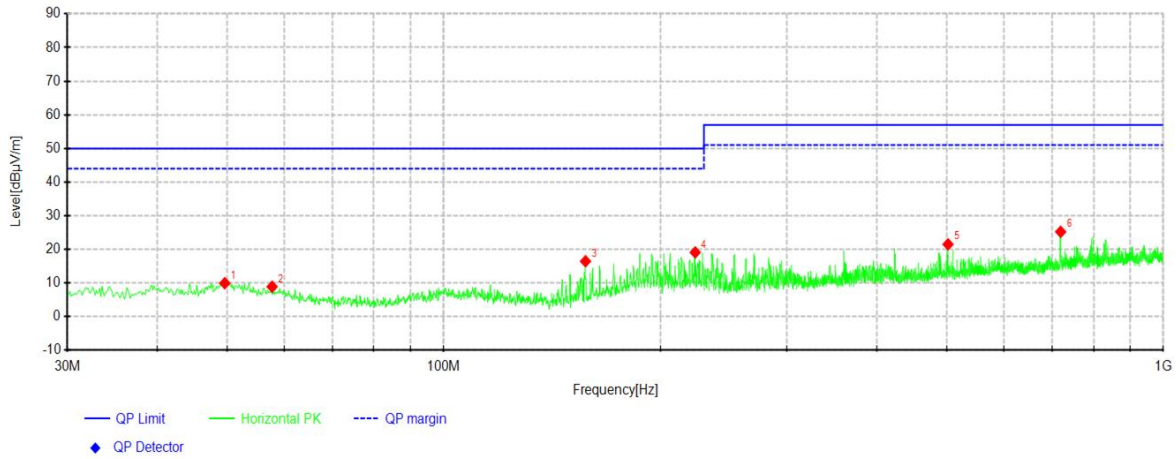


Suspected Data List

NO.	Freq. [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	49.6425	26.05	9.96	-16.09	50.00	40.04	100	241	Horizontal
2	57.7662	26.64	8.91	-17.73	50.00	41.09	100	257	Horizontal
3	157.433	38.12	16.47	-21.65	50.00	33.53	100	180	Horizontal
4	223.636	37.80	19.11	-18.69	50.00	30.89	100	157	Horizontal
5	502.147	35.78	21.52	-14.26	57.00	35.48	100	327	Horizontal
6	720.033	36.57	25.24	-11.33	57.00	31.76	100	86	Horizontal

EUT :	Brushless DC motor controller	Model Name :	60-800W
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2024-5-22
Test Mode :	Running	Polarization :	Vertical
Test Power :	AC220V/50Hz		

Remark:

1. All readings are Quasi-Peak and Peak values.
2. Factor = Antenna Factor + Cable Loss.
3. N/A means All Data have pass Limit

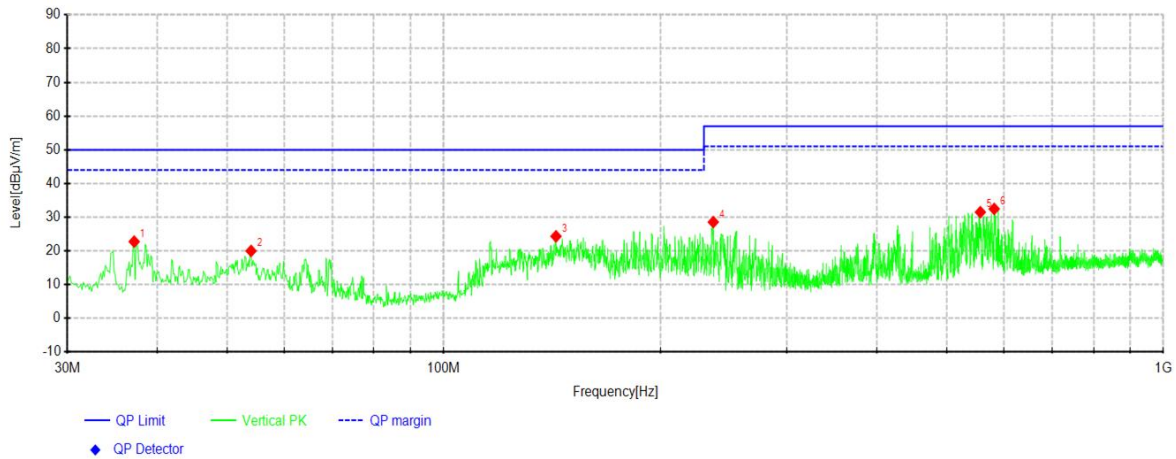
Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	37.1538	40.32	22.77	-17.55	50.00	27.23	100	126	Vertical
2	54.0075	36.93	20.01	-16.92	50.00	29.99	100	354	Vertical
3	143.247	46.13	24.35	-21.78	50.00	25.65	100	360	Vertical
4	236.973	46.90	28.57	-18.33	57.00	28.43	100	149	Vertical
5	556.831	44.96	31.52	-13.44	57.00	25.48	100	173	Vertical
6	582.051	45.22	32.49	-12.73	57.00	24.51	100	173	Vertical

3.2.6 TEST RESULTS(1000~6000MHz)

N/A

HARMONICS CURRENT
LIMITS OF HARMONICS CURRENT

IEC 555-2					
Table - I			Table - II		
Equipment Category	Harmonic Order n	Max. Permissible Harmonic Current (in Amperes)	Equipment Category	Harmonic Order n	Max. Permissible Harmonic Current (in Amperes)
Non Portable Tools or TV Receivers	Odd Harmonics		TV Receivers	Odd Harmonics	
	3	2.30		3	0.80
	5	1.14		5	0.60
	7	0.77		7	0.45
	9	0.40		9	0.30
	11	0.33		11	0.17
	13	0.21		13	0.12
	15≤n≤39	0.15 · 15/n		15≤n≤39	0.10 · 15/n
	Even Harmonics			Even Harmonics	
	2	1.08		2	0.30
4	0.43	4	0.15		
8	0.30				
8≤n≤40	0.23 · 8/n	DC	0.05		

EN 61000-3-2/IEC 61000-3-2					
Equipment Category	Max. Permissible Harmonic Current (in Amperes)	Equipment Category	Harmonic Order n	Max. Permissible Harmonic Current (in A) (mA/w)	
Class A	Same as Limits Specified in 4-2.1, Table - I, but only odd harmonics required	Class D	3	2.30	3.4
			5	1.14	1.9
			7	0.77	1.0
			9	0.40	0.5
			11	0.33	0.35
			13≤n≤39	see Table I	3.85/n
only odd harmonics required					

TEST PROCEDURE

a. The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under normal operating conditions.

b. The classification of EUT is according to section 5 of EN 61000-3-2. The EUT is classified as follows:

Class A: Balanced three-phase equipment, Household appliances excluding equipment as Class D, Tools excluding portable tools, Dimmers for incandescent lamps, audio equipment, equipment not specified in one of the three other classes.

Class B: Portable tools. Portable tools.; Arc welding equipment which is not professional equipment.

Class C: Lighting equipment.


Class D: Equipment having a specified power less than or equal to 600 W of the following types: Personal computers and personal computer monitors and television receivers.

c. The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the time necessary for the EUT to be exercised.

EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.3** Unless otherwise a special operating condition is specified in the follows during the testing.

TEST SETUP

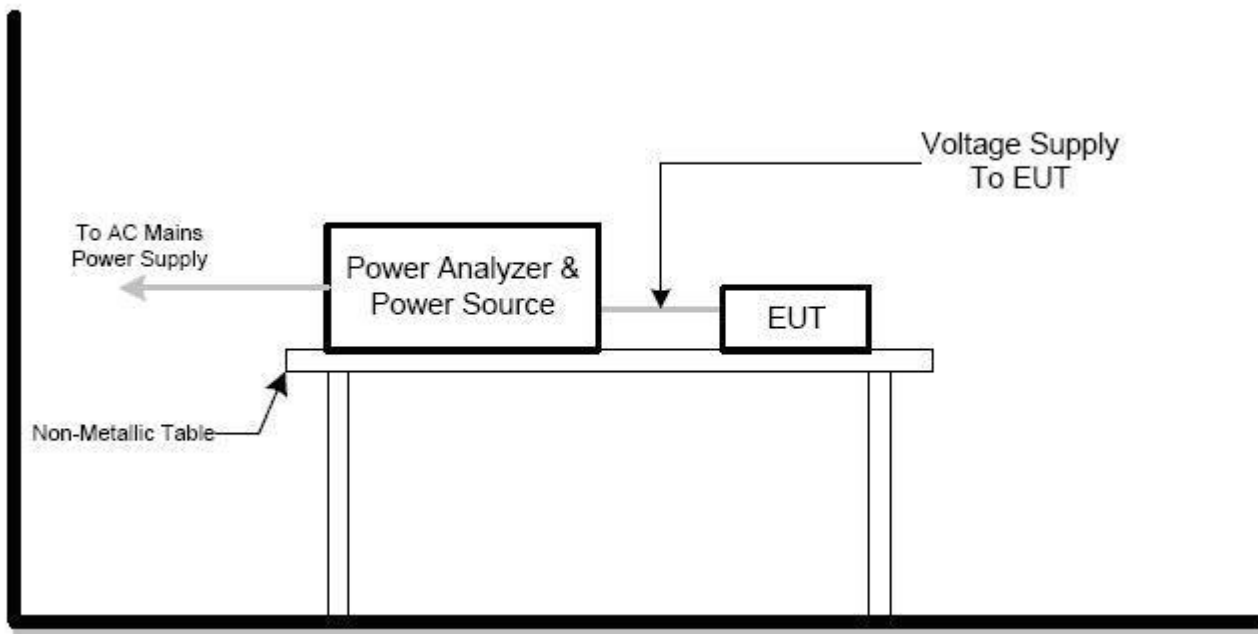



TEST RESULTS

EUT :	Brushless DC motor controller	Model Name :	60-800W
Temperature :	25 °C	Relative Humidity :	45%
Pressure :	1010 hPa	Test Date :	2024-5-22
Test Mode :	Running		
Test Power :	AC220V/50Hz		

PASS

No limit power above 1000W.



VOLTAGE FLUCTUATION AND FLICKERS

LIMITS OF VOLTAGE FLUCTUATION AND FLICKERS

Tests	Limits		Descriptions
	IEC555-3	IEC/EN 61000-3-3	
Pst	≤ 1.0, Tp= 10 min.	≤ 1.0, Tp= 10 min.	Short Term Flicker Indicator
Plt	N/A	≤ 0.65, Tp=2 hr.	Long Term Flicker Indicator
dc	≤ 3%	≤ 3.3%	Relative Steady-State V-Chang
dmax	≤ 4%	≤ 4%	Maximum Relative V-change
d (t)	N/A	≤ 3.3% for > 500 ms	Relative V-change characteristic

TEST PROCEDURE

a. Harmonic Current Test:

Test was performed according to the procedures specified in Clause 5.0 of IEC555-2 and/or Sub-clause 6.2 of IEC/EN 61000-3-2 depend on which standard adopted for compliance measurement.

b. Fluctuation and Flickers Test:


Tests was performed according to the Test Conditions/Assessment of Voltage Fluctuations specified in Clause 5.0/6.0 of IEC555-3 and/or Clause 6.0/4.0 of IEC/EN 61000-3-3 depend on which standard adopted for compliance measurement.

c. All types of harmonic current and/or voltage fluctuation in this report are assessed by direct measurement using flicker-meter.

EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.3** Unless otherwise a special operating condition is specified in the follows during the testing.

TEST SETUP

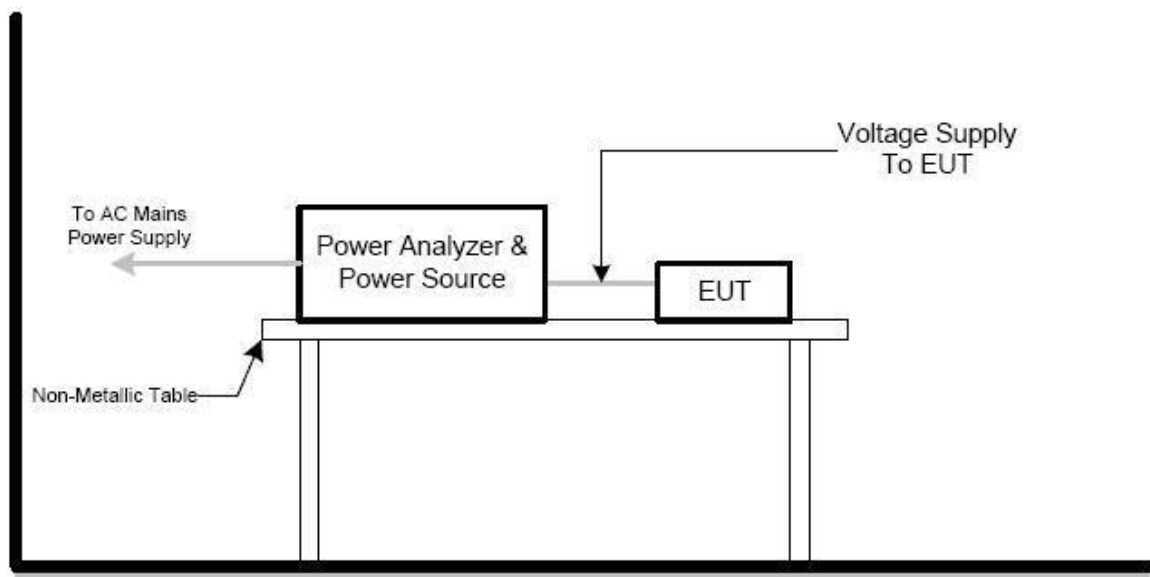



TEST RESULTS

EUT :	Brushless DC motor controller	Model Name :	60-800W
Temperature :	25 °C	Relative Humidity :	45%
Pressure :	1010 hPa	Test Date :	2024-5-22
Test Mode :	Running		
Test Power :	AC220V/50Hz		

Test Parameter	Measurement Value	Limit	Remarks
P _{st}	0.006	1.0	Pass
P _{It}	0.004	0.65	Pass
T _{dt(s)}	0.002	0.2	Pass
d _{max} (%)	0.00%	4%	Pass
d _c (%)	0.00%	3%	Pass



. EMC IMMUNITY TEST

STANDARD COMPLIANCE/SERVIRITY LEVEL/CRITERIA

Tests Standard No.	TEST SPECIFICATION	Test Mode Test Ports	Perform. Criteria
1. ESD IEC/EN 61000-4-2	8KV air discharge 4KV contact discharge	Direct Mode	B
	4KV HCP discharge 4KV VCP discharge	Indirect Mode	B
2. RS IEC/EN 61000-4-3	80 MHz to 1000 MHz, 1000Hz, 80%, AM modulated	Enclosure	A
3. EFT/Burst IEC/EN 61000-4-4	5/50ns Tr/Th 5KHz Repetition Freq.	Power Supply Port	B
	5/50ns Tr/Th 5KHz Repetition Freq.	CTL/Signal Data Line Port	B
4. Surges IEC/EN 61000-4-5	1.2/50(8/20) Tr/Th us	L-N	B
	1.2/50(8/20) Tr/Th us	L-PE N-PE	B
5 Injected Current IEC/EN 61000-4-6	0.15 MHz to 80 MHz, 1000Hz 80 % , AM Modulated 150Ω source impedance	CTL/Signal Port	A
	0.15 MHz to 80 MHz, 1000Hz 80 % , AM Modulated 150Ω source impedance	AC Power Port	A
	0.15 MHz to 80 MHz, 1000Hz 80 % , AM Modulated 150Ω source impedance	DC Power Port	A
6. Power Frequency Magnetic Field IEC/EN 61000-4-8	50 Hz,	Enclosure	A
7. Volt. Interruptions Volt. Dips IEC/EN 61000-4-11	Voltage dip 100%		B
	Voltage dip 30%	AC Power Port	C
	Interruption 100%		C

GENERAL PERFORMANCE CRITERIA

4.2.1 According to EN 61000-6-1 standard, the general performance criteria as following:

Criterion A	The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
Criterion B	After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test.
Criterion C	Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

4.2.2 GENERAL PERFORMANCE CRITERIA TEST SETUP

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

ESD TESTING

TEST SPECIFICATION

Basic Standard:	IEC/EN 61000-4-2
Discharge Impedance:	330 ohm / 150 pF
Required Performance	B
Discharge Voltage:	Air Discharge : 2kV/4kV/8kV (Direct) Contact Discharge : 2kV/4kV (Direct/Indirect)
Polarity:	Positive & Negative
Number of Discharge:	Air Discharge: min. 20 times at each test point Contact Discharge: min. 200 times in total
Discharge Mode:	Single Discharge
Discharge Period:	1 second minimum

TEST PROCEDURE

The test generator necessary to perform direct and indirect application of discharges to the EUT in the following manner:

- a. Contact discharge was applied to conductive surfaces and coupling planes of the EUT. During the test, it was performed with single discharges. For the single discharge time between successive single discharges was at least 1 second. The EUT shall be exposed to at least 200 discharges, 100 each at negative and positive polarity, at a minimum of four test points. One of the test points shall be subjected to at least 50 indirect discharges to the center of the front edge of the horizontal coupling plane. The remaining three test points shall each receive at least 50 direct contact discharges.

If no direct contact test points are available, then at least 200 indirect discharges shall be applied in the indirect mode. Test shall be performed at a maximum repetition rate of one discharge per second.

Vertical Coupling Plane (VCP):

The coupling plane, of dimensions 0.5m x 0.5m, is placed parallel to, and positioned at a distance 0.1m from, the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge.

Horizontal Coupling Plane (HCP):


The coupling plane is placed under to the EUT. The generator shall be positioned vertically at a distance of 0.1m from the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge.

- b. Air discharges at insulation surfaces of the EUT.

It was at least ten single discharges with positive and negative at the same selected point.

TEST SETUP

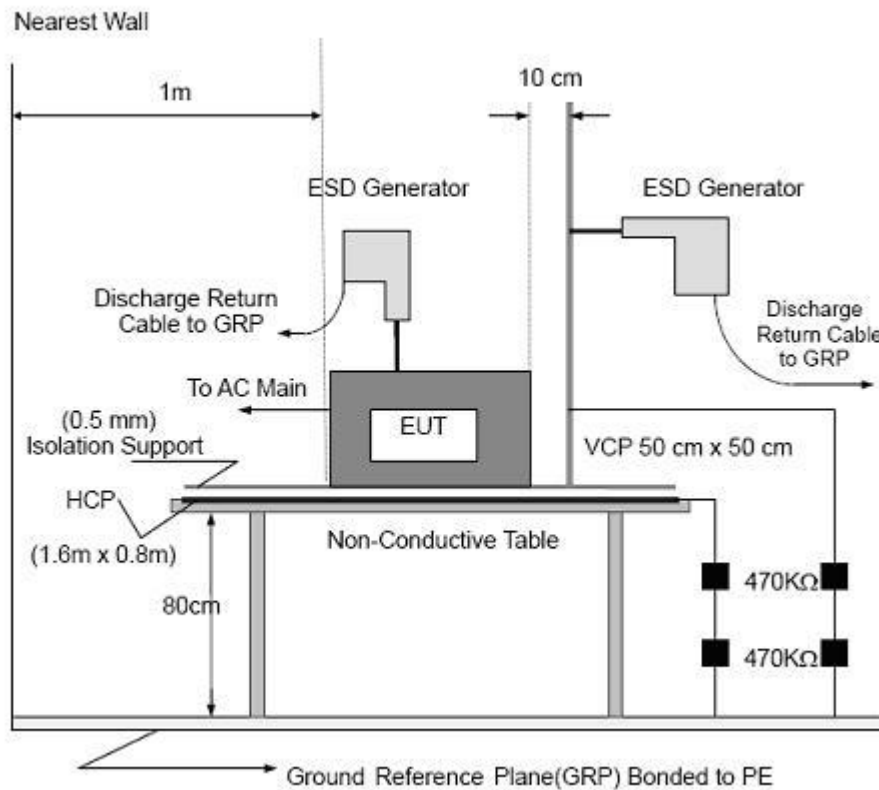

Note:

TABLE-TOP EQUIPMENT

The configuration consisted of a wooden table 0.8 meters high standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system. A Horizontal Coupling Plane (1.6m x 0.8m) was placed on the table and attached to the GRP by means of a cable with 940k total impedance. The equipment under test, was installed in a representative system as described in section 7 of IEC /EN 61000-4-2, and its cables were placed on the HCP and isolated by an insulating support of 0.5mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

FLOOR-STANDING EQUIPMENT

The equipment under test was installed in a representative system as described in section 7 of IEC/EN 61000-4-2, and its cables were isolated from the Ground Reference Plane by an insulating support of 0.1-meter thickness. The GRP consisted of a sheet of aluminum that is at least 0.25mm thick, and 2.5meters square connected to the protective grounding system and extended at least 0.5 meters from the EUT on all sides.



TEST RESULTS

EUT :	Brushless DC motor controller	Model Name :	60-800W
Temperature :	25 °C	Relative Humidity :	45%
Pressure :	1010 hPa	Test Date :	2024-5-22
Test Mode :	Running		
Test Power :	AC220V/50Hz		

Mode	Air Discharge								Contact Discharge								Criterion	Result
	2		4		8		15		2		4		6		8			
Test level (kV)																		
Test Location	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-		
HCP									A	A	A	A					B	PASS
VCP									A	A	A	A						PASS
shell									A	A	A	A						PASS

Note:

- 1) +/- denotes the Positive/Negative polarity of the output voltage.
- 2) Test condition:
Direct / Indirect (HCP/VCP) discharges: Minimum 50 times (Positive/Negative) at each point. Air discharges: Minimum 10 times (Positive/Negative) at each point.
- 3) Test location(s) in which discharge (Air and contact discharge) to be applied illustrated by photos shown in next page(s)
- 4) The Indirect (HCP/VCP) discharges description of test point as following:
1.left side 2.right side 3.front side 4.rear side
- 5) N/A - denotes test is not applicable in this test report



RS TESTING

TEST SPECIFICATION

Basic Standard:	IEC/EN 61000-4-3
Required Performance	A
Frequency Range:	80 MHz - 1000 MHz 1.4 GHz – 2.0 GHz 2.0 GHz – 2.7 GHz
Field Strength:	10 V/m, 3 V/m, 1 V/m,
Modulation:	1kHz Sine Wave, 80%, AM Modulation
Frequency Step:	1 % of fundamental
Polarity of Antenna:	Horizontal and Vertical
Test Distance:	3 m
Antenna Height:	1.5 m
Dwell Time:	at least 3 seconds

TEST PROCEDURE


The EUT and support equipment, which are placed on a table that is 0.8 meter above ground and the testing was performed in a fully-anechoic chamber.

The testing distance from antenna to the EUT was 3 meters.

The other condition as following manner:

- a. The frequency range is swept from 80 MHz to 1000 MHz, & 1400MHz - 2700MHz with the signal 80%amplitude modulated with a 1kHz sine wave. The rate of sweep did not exceed 1.5x 10⁻³ decade/s. Where the frequency range is swept incrementally, the step size was 1% of fundamental.
- b. Sweep Frequency 900 MHz, with the Duty Cycle:1/8 and Modulation: Pulse 217 Hz(if applicable)
- c. The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.
- d. The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

TEST SETUP

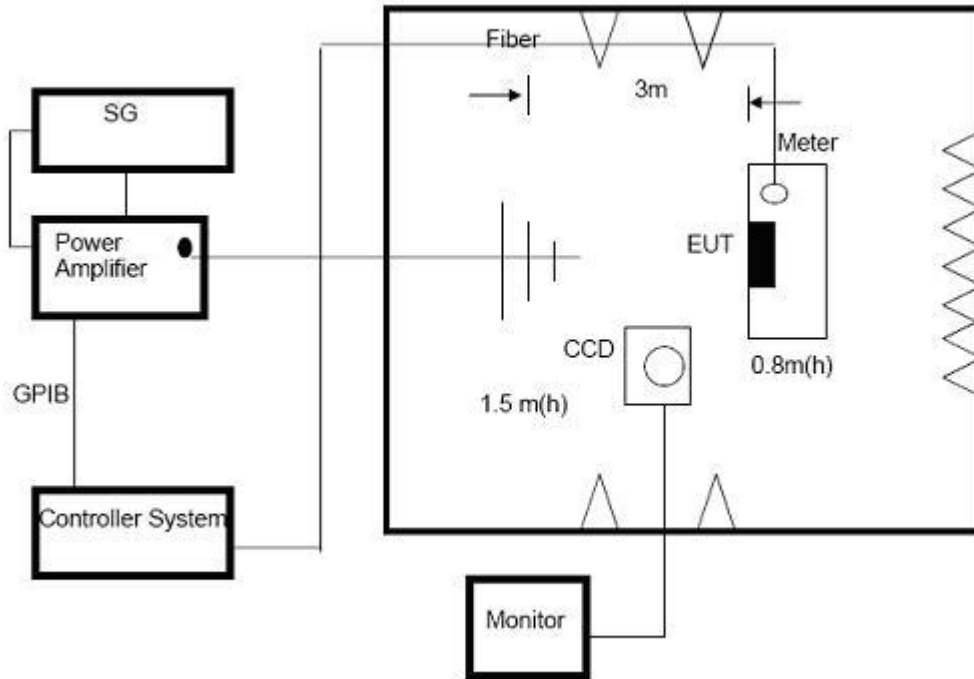

Note:

TABLE-TOP EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC/EN 61000-4-3 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

FLOOR-STANDING EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC/EN 61000-4-3 was placed on a non-conductive wood support 0.1 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

TEST RESULTS

EUT :	Brushless DC motor controller	Model Name :	60-800W
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2024-5-22
Test Mode :	Running		
Test Power :	AC220V/50Hz		

Frequency Range (MHz)	RF Field Position	R.F. Field Strength	Azimuth	Perform. Criteria	Results	Judgment
80MHz - 1000MHz	H / V	10V/m (rms) AM Modulated 1000Hz, 80%	Front	A	A	PASS
			Rear			
			Left			
			Right			
1.4 GHz – 2.7 GHz	H / V	3 V/m (rms) AM Modulated 1000Hz, 80%	Front	A	A	PASS
			Rear			
			Left			
			Right			
2.0 GHz – 2.7 GHz	H / V	1 V/m (rms) AM Modulated 1000Hz, 80%	Front	A	A	PASS
			Rear			
			Left			
			Right			

Note:

- 1) N/A - denotes test is not applicable in this test report.
- 2) Criteria A: There was no change operated with initial operating during the test.
- 3) Criteria B: The EUT function loss during the test, but self-recoverable after the test.
- 4) Criteria C: The system shut down during the test.

EFT/BURST TESTING

TEST SPECIFICATION



Basic Standard:	IEC/EN 61000-4-4
Required Performance	B
Test Voltage:	Power Line : 1 kV Signal/Control Line : 0.5 KV
Polarity:	Positive & Negative
Impulse Frequency:	5 kHz
Impulse Wave shape :	5/50 ns
Burst Duration:	15 ms
Burst Period:	300 ms
Test Duration:	Not less than 1 min.

TEST PROCEDURE

The EUT and its simulators were placed on a ground reference plane and were insulated from it by a wood support 0.1m + 0.01m thick. The ground reference plane was 1m*1m metallic sheet with 0.65mm minimum thickness. The other condition as following manner:

- a. The length of power cord between the coupling device and the EUT should not exceed 1 meter.
- b. Both positive and negative polarity discharges were applied.
- c. The duration time of each test sequential was 1 minute

TEST SETUP

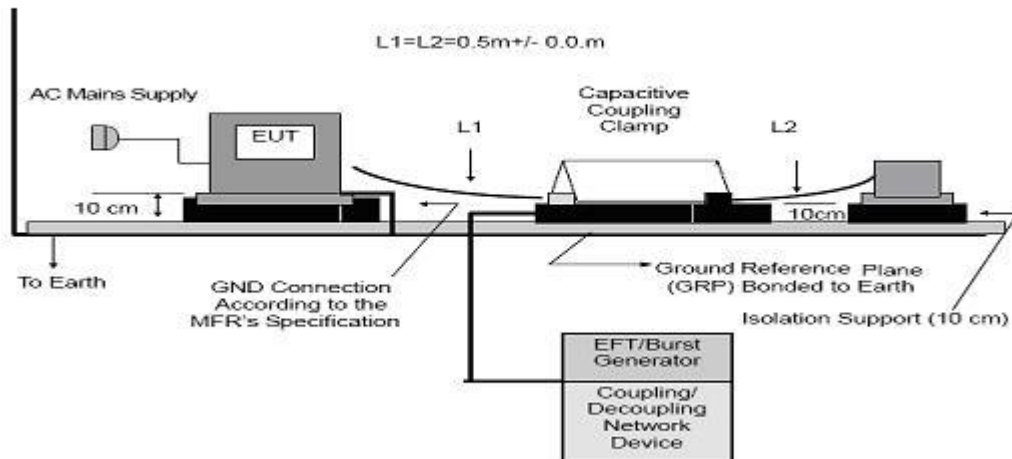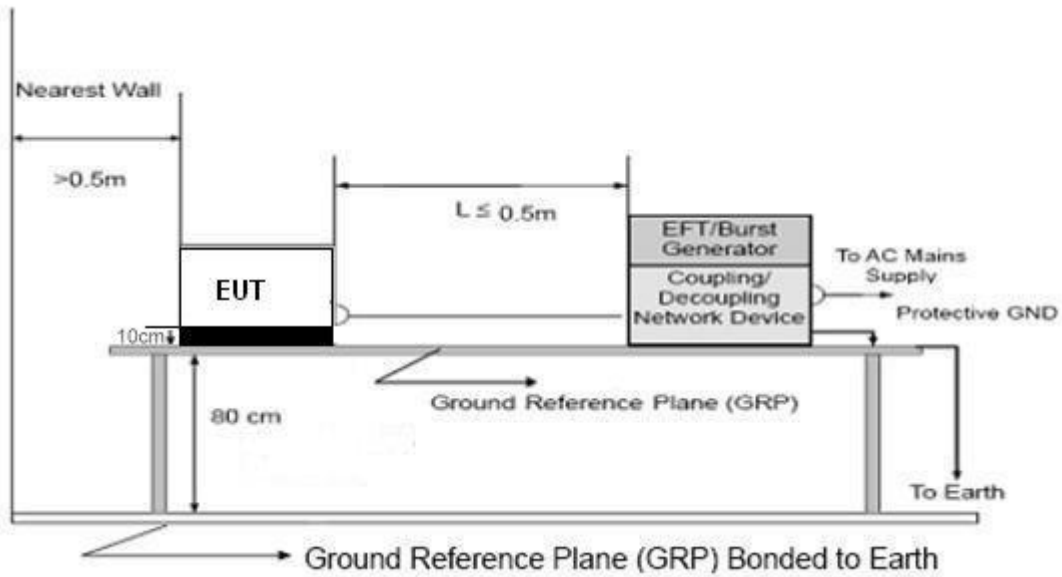

Note:

TABLE-TOP EQUIPMENT

The configuration consisted of a wooden table (0.8m high) standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum (at least 0.25mm thick and 2.5m square) connected to the protective grounding system. A minimum distance of 0.5m was provided between the EUT and the walls of the laboratory or any other metallic structure.

FLOOR-STANDING EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC/EN 61000-4-4 and its cables, were isolated from the Ground Reference Plane by an insulating support that is 0.1-meter thick. The GRP consisted of a sheet of aluminum (at least 0.25mm thick and 2.5m square) connected to the protective grounding system.

TEST RESULTS

EUT :	Brushless DC motor controller	Model Name :	60-800W
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2024-5-22
Test Mode :	Running		
Test Power :	AC220V/50Hz		

Coupling Line		Test level (kV)								Criterion	Result
		0.5		1		2		4			
		+	-	+	-	+	-	+	-		
AC line	L	A	A	A	A					B	PASS
	N	A	A	A	A						PASS
	PE	A	A	A	A						PASS
	L+N	A	A	A	A	A	A				PASS
	L+PE	A	A	A	A	A	A				PASS
	N+PE	A	A	A	A	A	A				PASS
	L+N+PE	A	A	A	A	A	A				PASS
DC Line											
Signal Line											

Note:

- 1) +/- denotes the Positive/Negative polarity of the output voltage.
- 2) N/A - denotes test is not applicable in this test report
- 3) Criteria A: There was no change operated with initial operating during the test.
- 4) Criteria B: The EUT function loss during the test, but self-recoverable after the test.
- 5) Criteria C: The system shut down during the test.

SURGE TESTING

TEST SPECIFICATION

Basic Standard:	IEC/EN 61000-4-5
Required Performance	B
Wave-Shape:	Combination Wave 1.2/50 us Open Circuit Voltage 8 /20 us Short Circuit Current
Test Voltage:	Power Line : 1 kV
Surge Input/Output:	L-N, L-PE, N-PE
Generator Source:	2 ohm between networks
Impedance:	12 ohm between network and ground
Polarity:	Positive/Negative
Phase Angle:	0 /90/180/270°
Pulse Repetition Rate:	1 time / min. (maximum)
Number of Tests:	5 positive and 5 negative at selected points

TEST PROCEDURE

a. For EUT power supply:

The surge is to be applied to the EUT power supply terminals via the capacitive coupling network. Decoupling networks are required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines, and to provide sufficient decoupling impedance to the surge wave. The power cord between the EUT and the coupling/decoupling networks shall be 2meters in length (or shorter).


b. For test applied to unshielded unsymmetrically operated interconnection lines of EUT:

The surge is applied to the lines via the capacitive coupling. The coupling /decoupling networks shall not influence the specified functional conditions of the EUT. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).

c. For test applied to unshielded symmetrically operated interconnection /telecommunication lines of EUT:

d. The surge is applied to the lines via gas arrestors coupling. Test levels below the ignition point of the coupling arrestor cannot be specified. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).

TEST SETUP

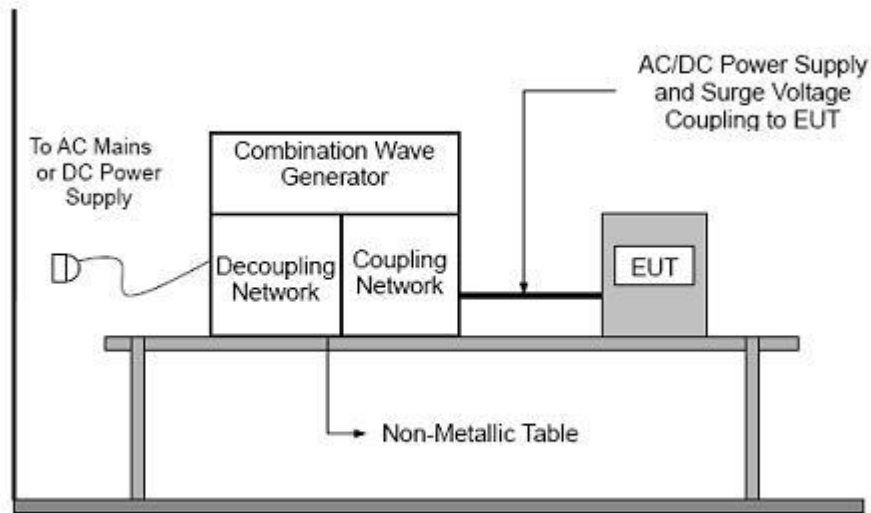



TEST RESULTS

EUT :	Brushless DC motor controller	Model Name :	60-800W
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2024-5-22
Test Mode :	Running		
Test Power :	AC220V/50Hz		

Coupling Line		Test level								Criterion	Result	
		0.5 kV		1 kV		2 kV						
		+	-	+	-	+	-					
AC line	L-N	0°	A	A	B	B					B	PASS
		90°	A	A	B	B						
		180°	A	A	B	B						
		270°	A	A	B	B						
	L-PE	0°	A	A	A	A	A	A				PASS
		90°	A	A	A	A	A	A				
		180°	A	A	A	A	A	A				
		270°	A	A	A	A	A	A				
	N-PE	0°	A	A	A	A	A	A				PASS
		90°	A	A	A	A	A	A				
		180°	A	A	A	A	A	A				
		270°	A	A	A	A	A	A				
DC Line												
Signal Line												

Note:

- 1) Polarity and Numbers of Impulses : 5 Pst / Ngt at each tested mode
- 2) N/A - denotes test is not applicable in this Test Report
- 3) Criteria A: There was no change operated with initial operating during the test.
- 4) Criteria B: The EUT function loss during the test, but self-recoverable after the test.
- 5) Criteria C: The system shut down during the test.



INJECTION CURRENT TESTING

TEST SPECIFICATION

Basic Standard:	IEC/EN 61000-4-6
Required Performance	A
Frequency Range:	0.15 MHz - 80 MHz
Field Strength:	10 V
Modulation:	1kHz Sine Wave, 80%, AM Modulation
Frequency Step:	1 % of fundamental
Dwell Time:	at least 3 seconds


TEST PROCEDURE

The EUT are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50mm (where possible). The disturbance signal described below is injected to EUT through CDN.

The other condition as following manner:

- The frequency range is swept from 150 KHz to 80 MHz, with the signal 80%amplitude modulated with a 1kHz sine wave. The rate of sweep did not exceed 1.5×10^{-3} decade/s. Where the frequency range is swept incrementally, the step size was 1% of fundamental.
- The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.

TEST SETUP

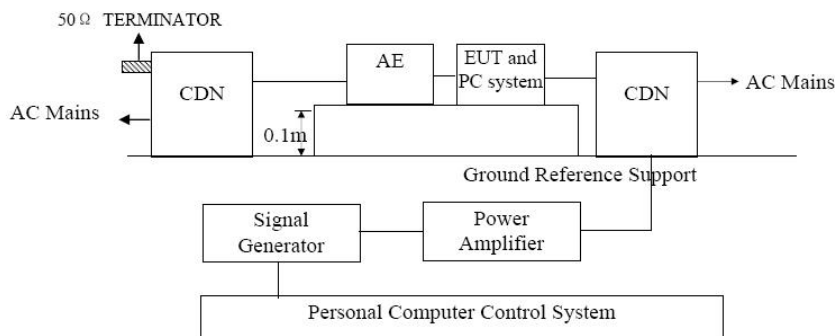

NOTE:

FLOOR-STANDING EQUIPMENT

The equipment to be tested is placed on an insulating support of 0.1 meters height above a ground reference plane. All relevant cables shall be provided with the appropriate coupling and decoupling devices at a distance between 0.1 meters and 0.3 meters from the projected geometry of the EUT on the ground reference plane.

TEST RESULTS

EUT :	Brushless DC motor controller	Model Name :	60-800W
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2024-5-22
Test Mode :	Running		
Test Power :	AC220V/50Hz		

Test Ports (Mode)	Freq. Range MHz)	Field Strength	Perform. Criteria	Results	Judgment
Input/ Output AC. Power Port	0.15 ---80	10V AM Modulated 1000Hz, 80%	A	A	PASS
Input/ Output DC. Power Port	0.15 --- 80		A	N/A	N/A
Signal Line	0.15 --- 80		A	N/A	N/A

Note:

- 1) N/A - denotes test is not applicable in this Test Report.
- 2) Criteria A: There was no change operated with initial operating during the test.
- 3) Criteria B: The EUT function loss during the test, but self-recoverable after the test.
- 4) Criteria C: The system shut down during the test.



POWER FREQUENCY MAGNETIC FIELD TESTING

TEST SPECIFICATION

Basic Standard:	IEC/EN 61000-4-8
Required Performance	A
Frequency Range:	50-60Hz
Field Strength:	30 A/m
Observation Time:	1 minute
Inductance Coil:	Rectangular type, 1mx1m

TEST PROCEDURE


The EUT and support equipment, are placed on a table that is 0.8 meter above a metal ground plane measured 1m*1m min. and 0.65mm thick min.

The other condition as following manner:

- a. The equipment cabinets shall be connected to the safety earth directly on the GRP via the earth terminal of the EUT.
- b. The cables supplied or recommended by the equipment manufacturer shall be used. 1 meter of all cables used shall be exposed to the magnetic field.



TEST SETUP

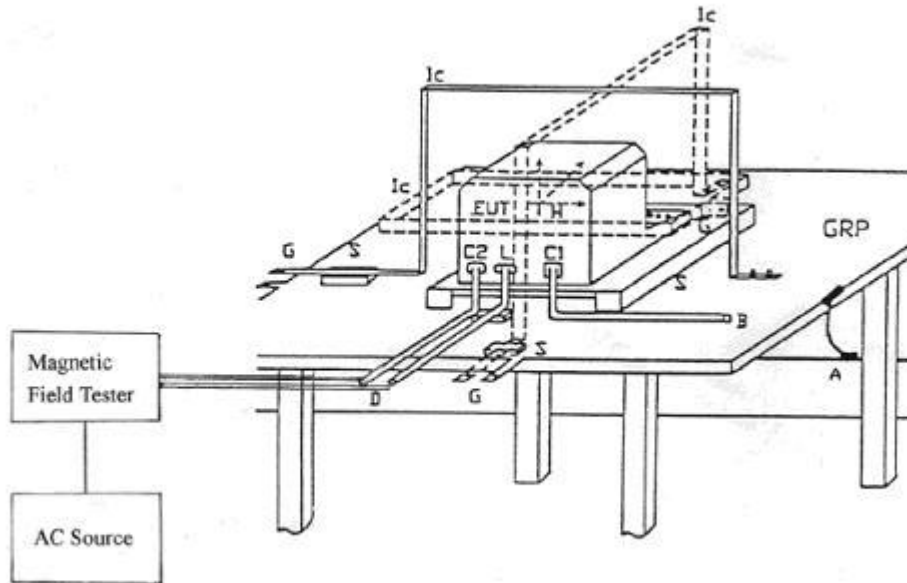

Note:

TABLE-TOP EQUIPMENT

The equipment shall be subjected to the test magnetic field by using the induction coil of standard dimension (1 m x 1 m). The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.

FLOOR-STANDING EQUIPMENT

The equipment shall be subjected to the test magnetic field by using induction coils of suitable dimensions. The test shall be repeated by moving and shifting the induction coils, in order to test the whole volume of the EUT for each orthogonal direction. The test shall be repeated with the coil shifted to different positions along the side of the EUT, in steps corresponding to 50 % of the shortest side of the coil. The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.



TEST RESULTS

EUT :	Brushless DC motor controller	Model Name :	60-800W
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2024-5-22
Test Mode :	Running		
Test Power :	AC220V/50Hz		

Test Mode	Test Level	Antenna aspect	Duration (s)	Perform Criteria	Results	Judgment
Enclosure	30 A/m	X	60 s	A	A	Pass
Enclosure	30 A/m	Y	60 s	A	A	Pass
Enclosure	30 A/m	Z	60 s	A	A	Pass

Note:

- 1) N/A - denotes test is not applicable in this test report
- 2) Criteria A: There was no change operated with initial operating during the test.
- 3) Criteria B: The EUT function loss during the test, but self-recoverable after the test.
- 4) Criteria C: The system shut down during the test.



VOLTAGE INTERRUPTION/DIPS TESTING


TEST SPECIFICATION

Basic Standard:	IEC/EN 61000-4-11
Required Performance	B (For 100% Voltage Dips) C (For 30% Voltage Dips) C (For 100% Voltage Interruptions)
Test Duration Time:	Minimum three test events in sequence
Interval between Event:	Minimum ten seconds
Phase Angle:	0°/45°/90°/135°/180°/225°/270°/315°/360°
Test Cycle:	3 times

TEST PROCEDURE

The EUT shall be tested for each selected combination of test levels and duration with a sequence of three dips/interruptions with intervals of 10 s minimum (between each test event). Each representative mode of operation shall be tested. Abrupt changes in supply voltage shall occur at zero crossings of the voltage waveform.

TEST SETUP

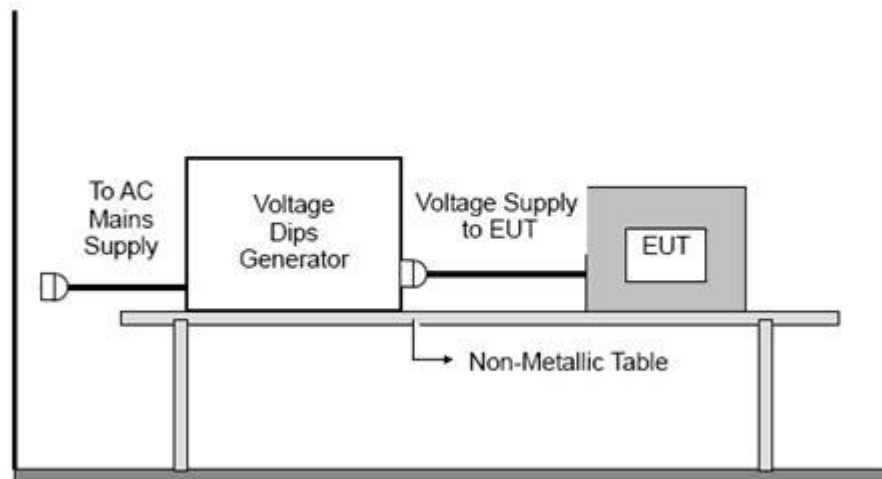

TEST RESULTS

EUT :	Brushless DC motor controller	Model Name :	60-800W
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2024-5-22
Test Mode :	Running		
Test Power :	AC220V/50Hz		

Interruption & Dips	Duration (T)	Perform Criteria	Results	Judgment
Voltage dip 100%	0.5	B	B	PASS
Voltage dip 100%	1	B	B	PASS
Voltage dip 30%	25/30 <small>Note5</small>	C	B	PASS
Voltage dip 100%	250/300 <small>Note5</small>	C	C	PASS

Note:

- 1). N/A - denotes test is not applicable in this test report.
- 2) Criteria A: There was no change operated with initial operating during the test.
- 3) Criteria B: The EUT function loss during the test, but self-recoverable after the test.
- 4) Criteria C: The system shut down during the test.
- 5) 25/30 cycles" means "25 cycles for 50 Hz test" and "30 cycles for 60 Hz test"

EUT TEST PHOTO







THE END